

Vismart

Intelligent Building Systems

CONTACT

VIDEOCOM-UK Electronics and Software Ltd.
Unit 2, Little Britain House, Alma Road
Chesham, Buckinghamshire
HP5 3HB
London, United Kingdom
Phone: 02036379656 Fax: 020 36379657


Vismart

Intelligent Building Systems

VIP-9001

TOUCH SCREEN IP DOOR PANEL

USER MANUAL

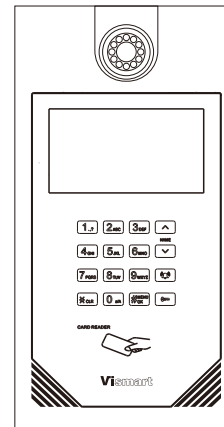

VIP-9001 USER MANUAL

GENERAL PROPERTIES	2
BUTTON AND LED INFORMATION.....	3
DIMENSIONS.....	4
INSTRUCTIONS	5-12

We are very grateful that you choose our IP Video Intercom System.
Please read the manual and follow the steps carefully. If you have any queries,
please consult the authorized services.

- *) TCP IP Door Panel
- *) VoIP Intercom
- *) 720P High Definition Camera
- *) User Name List
- *) Flush Mount Case
- *) 800x480 LCD Screen
- *) Touch screen keypad
- *) Crsyal clear voice communication
- *) IC Card Reader
- *) SD Card Support
- *) W: 230 x H: 452 x L: 44

ATTENTION

- 1) Install the panel away from rain and direct sun light.
- 2) Do not try to open the case of the panel.
- 3) Device is not water resistant, please keep it away from fluids.
- 4) Contact the housing estate managements technical team in any case of issue with the panel, if your housing estate management doesn't have a technical team please contact your product supplier.




WARNING

SECURITY INFORMATION

- Only qualified technicians can install and repair this door panel.
- Do not remove the plastic and metal parts of the door panel to avoid warranty void.
- Do not put your ear too close to the door bell when it rings to prevent any temporary or permanent harm to hearing.
- Please inform authorized services of any malfunctioning device as they may effect other devices performance.
- Please read the user manual and security information before start using the product.

BUTTON AND LED INFORMATION

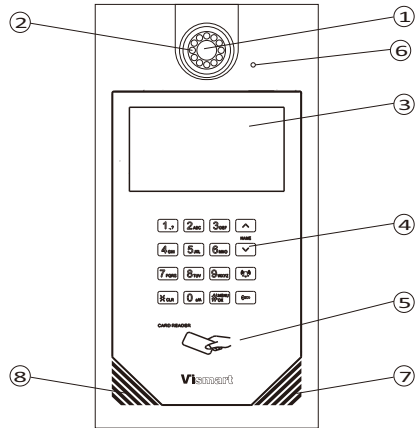


- 1 . Camera
- 2 . 8 Illumination LED
- 3 . LCD Screen
- 4 . Touch Panel Numpad
- 5 . IC Card Reader
- 6 . Microphone
- 7 . Speaker
- 8 . IR Receiver

TECHNICAL PROPERTIES


Input Voltage	DC 12V-18V
Screen	7" Touch LCD Screen
Numpad	LED illuminated Touch Panel
Standby Current	150mA@24V
Operating Current	250mA@24V
Sound	70db
Operating Temperature Range	-20°C ~55°C
Screen Resolution	800X480
Call Duration	2 minutes
Camera	Digital 720P
Dimensions	230mmx452mmx44mm

DIMENSIONS

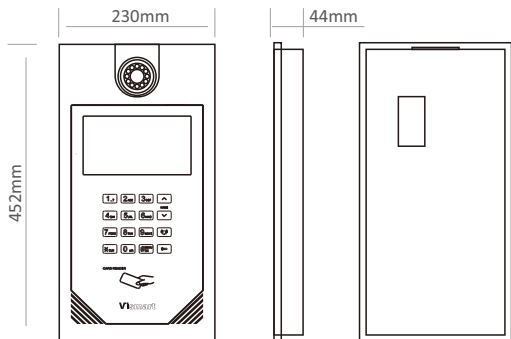

Cables:

- 1.Zone Connection Cable (10 Pin)
- 2.RS485 Cable (3 Pin)
- 3.Electronic Lock Cable (3 Pin)
- 4.Power Cable (2 Pin)




Wall Plugs and Screws - 4 Sets




INSTRUCTIONS

Technician Settings

To enter technician menu press the # button twice than enter the password(9999 in factory settings) and press the # button again.

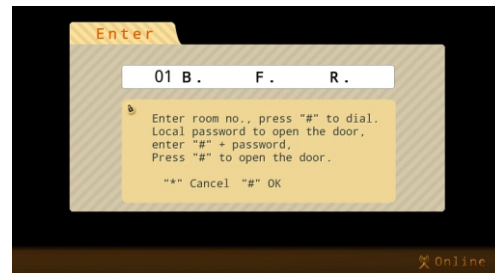


On the next screen enter the password of '234567'and press the # button.

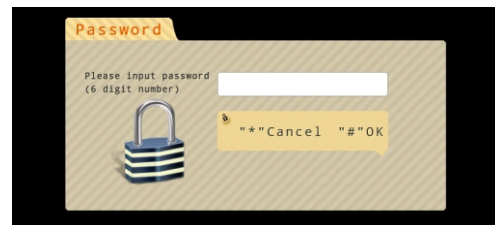


To navigate in the menu use the 2, 4, 6, 8, * and # buttons as:
 4 for Left
 6 for Right
 2 for Up
 8 for Down
 # for OK
 * for Back

INSTRUCTIONS

In the User Menu, use the navigation buttons to navigate and press # to enter the option you want. In the sub-menu again use the navigation buttons to enter the desired menu.

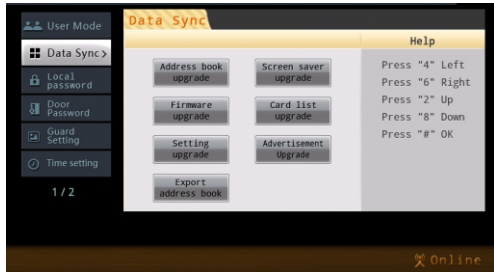


Factory default password is '234567', you can change the password in this section shown in the image below.

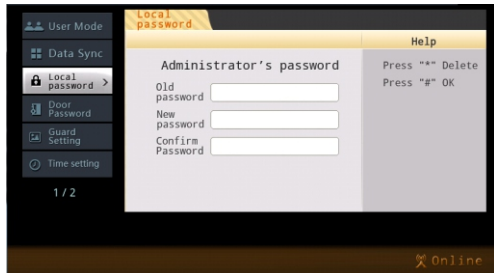


USER SETTINGS

To specify a password for unlocking the door, use this section shown in the image below.

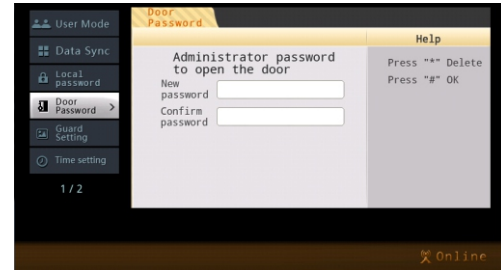


Alarms can be set and alarm time can be adjusted in the Alarm Settings section.

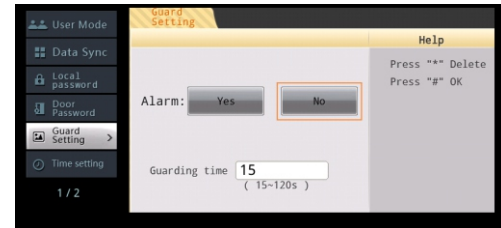


USER SETTINGS

In the Time Settings Menu;

- Leave a Message Time(if the system is connected to the server),
- Ring Duration,
- Call Duration,
- Door Unlock Time, can be adjusted.

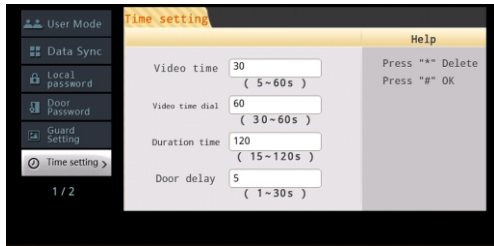


IP settings of the device can be changed in the System Information menu.

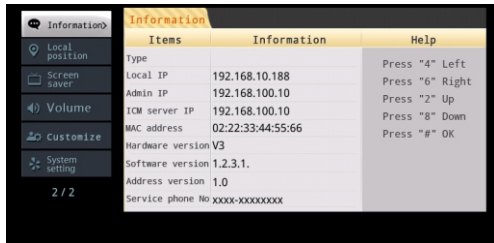


USER SETTINGS

Device type of the door panel can be changed based on the use in the Location of the Device Menu.

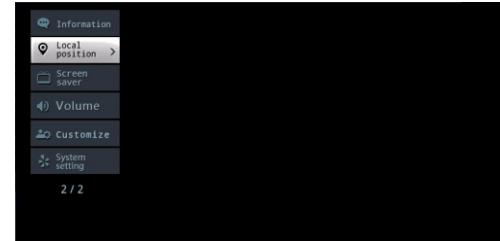


Screensaver settings can be adjusted in the Screen Saver Settings.

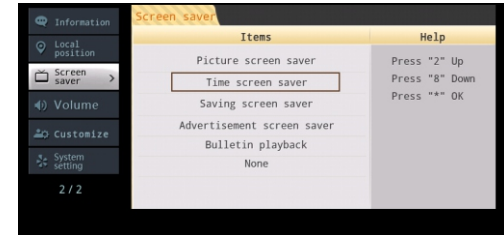


USER SETTINGS

Sound settings can be adjusted in the Sound Settings menu.

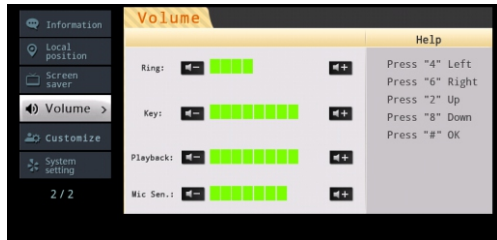

Melody, Alarm Sound and Touch Sounds can be changed in the Personalization Settings.

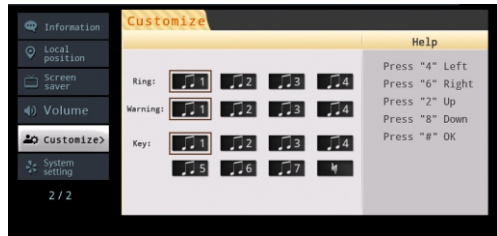

USER SETTINGS

In the System Settings, system language can be changed, factory reset and system restart can be performed.

